

```

#include <QCoreApplication>

void findValueByName()
{
}

int main(int argc, char *argv[])
{
    QCoreApplication a(argc, argv);


    findValueByName();

    return a.exec();
}


```

Place cursor on call to findValueByName and press Ctrl-Shift -R to rename.

In the Search Results window check Preserve Case.

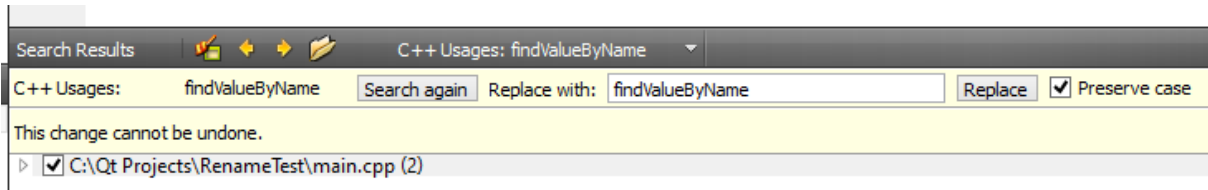

Place cursor in Replace With field before the B of By. Press delete twice.

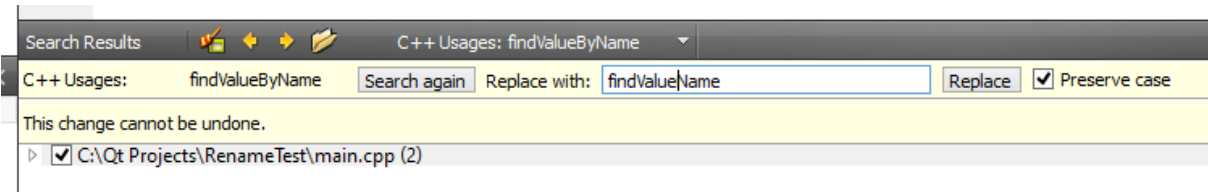

Press Replace button. Erroneous result below.

```

#include <QCoreApplication>

void findValue Name()
{
}

int main(int argc, char *argv[])
{
    QCoreApplication a(argc, argv);

    findValue Name();

    return a.exec();
}

```